

# Matterhorn™ KB8010


## A USB Type-C™ 40 Gbit/s Multiprotocol Switch and Bidirectional Bit-Level Retimer

The KB8010 is a USB Type-C™ 40 gigabit per second (Gbit/s) multiprotocol switch and bidirectional bit-level retimer. All four lanes of the KB8010 are bidirectional. This makes it a versatile signal retimer applicable in both host (source) and device (sink) applications.

A Two-Wire Interface (TWI) connects to the Power Delivery (PD) microcontroller for initialization and configuration operations. The Sideband Use (SBU) interface carries sideband information used by the USB Type-C Alt Mode.

### Features

- ▶ USB4 Gen2/3 signaling (20 and 40 Gbit/s)
- ▶ USB 3.2 SuperSpeed+ signaling (5 and 10 Gbit/s)
- ▶ Display Port™ 1.4a LTTTPR non-transparent and transparent up to HBR3 (8.1 Gbit/s) x1, x2, x4
- ▶ DisplayPort 2.1 LTTTPR Non-Transparent and Transparent up to UHBR 20 Gbit/s x1, x2, x4
- ▶ Thunderbolt™ 3 and 2 (20.625 and 10.3125 Gbit/s)
- ▶ On-chip diagnostics include Eye Scope and bit error rate (BER) monitors
- ▶ TX de-emphasis for up to 8 dB at 10.315 GHz
- ▶ RX equalization with DFE tap weight adjustment for equalization up to 23 dB at 10.315 GHz
- ▶ External configuration through TWI (I<sup>2</sup>C) for up to four device addresses
- ▶ Integrated DC blocking capacitors on SBU lines
- ▶ Temperature range: 0°C to 65°C
- ▶ Package: 72p, 5x5mm FCCSP (BGA) package
- ▶ Package and pin compatible with KB8002

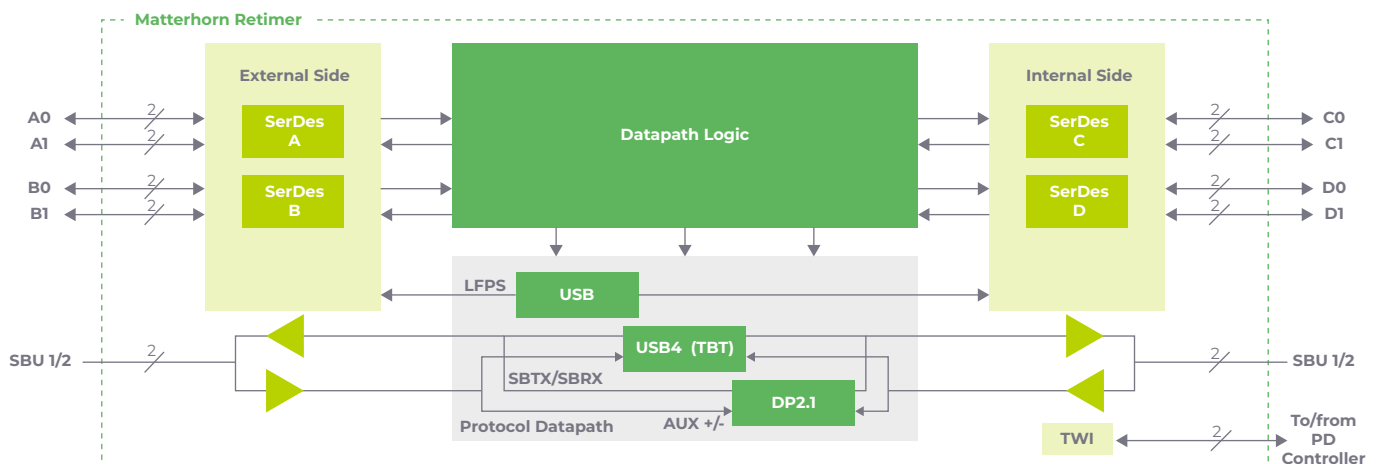

## Benefits

### Total Solution Area

Compact 5x5mm package with smaller external components supports a total solution of <50% PCB area versus competitors. This enables smaller form factor designs where PCB area is a premium such as tablets and ultra-slim notebooks.

### Longer PCB Traces

Superior channel performance by dynamically correcting for extreme channel characteristics with no tuning. This enables designs that require a longer PCB trace length to use more cost-effective materials and more flexible PCB routing.

### Low Active Power

<50% low active power in USB4 and DP-ALT mode, which enables a more efficient and cost-effective thermal solution for smaller form factor designs.

### Low System Cost


Integrated DC Blocking capacitors, analog MUX, pull-up / pull-down resistors for multiple protocols and no requirement for serial memory. Package and pinout enables Type 3 standard PCB technology and simple PCB routing.

### Compliance Ready

Compliant ready and proven solution for USB4, Thunderbolt 3 backward compatible, USB 3.2 and DisplayPort 2.1, which enables a proven low risk development path for customer adoption and rollout.

## Applications

- ▶ Mobile, Tablets and Desktop PCs
- ▶ Docking stations and adapters
- ▶ AR / VR headsets
- ▶ Gaming consoles

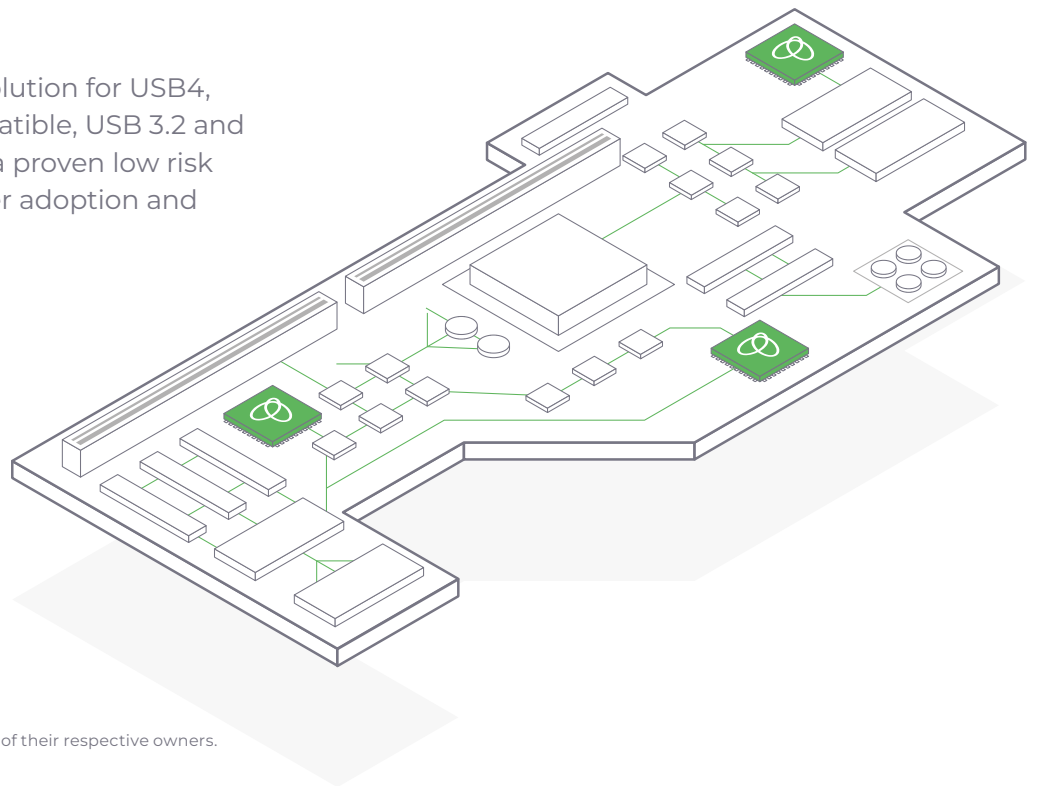

All product names, logos, and brands are property of their respective owners.

For ordering or more information, contact [sales@kandou.com](mailto:sales@kandou.com)  
[www.kandou.com](http://www.kandou.com)

2023 Kandou Bus SA. All rights reserved.